

SHEET BRACE STRAPS

COMPLIES WITH SECTION 8 NZS 3604:2011

- 6kN and 12kN fixings
- Available in 200, 300, 400 and 600mm lengths
- Quick and easy to apply

USE STAINLESS STEEL OPTION IN EXTERIOR SITUATIONS

TIMBER FLOOR EXTERNAL WALL


300mm Sheet Brace Strap

TIMBER FLOOR INTERNAL WALL

300mm Sheet Brace Strap Twisted (on-site)

CONCRETE FLOOR

2/300mm Sheet Brace Straps - 1 each side, not under bottom plate

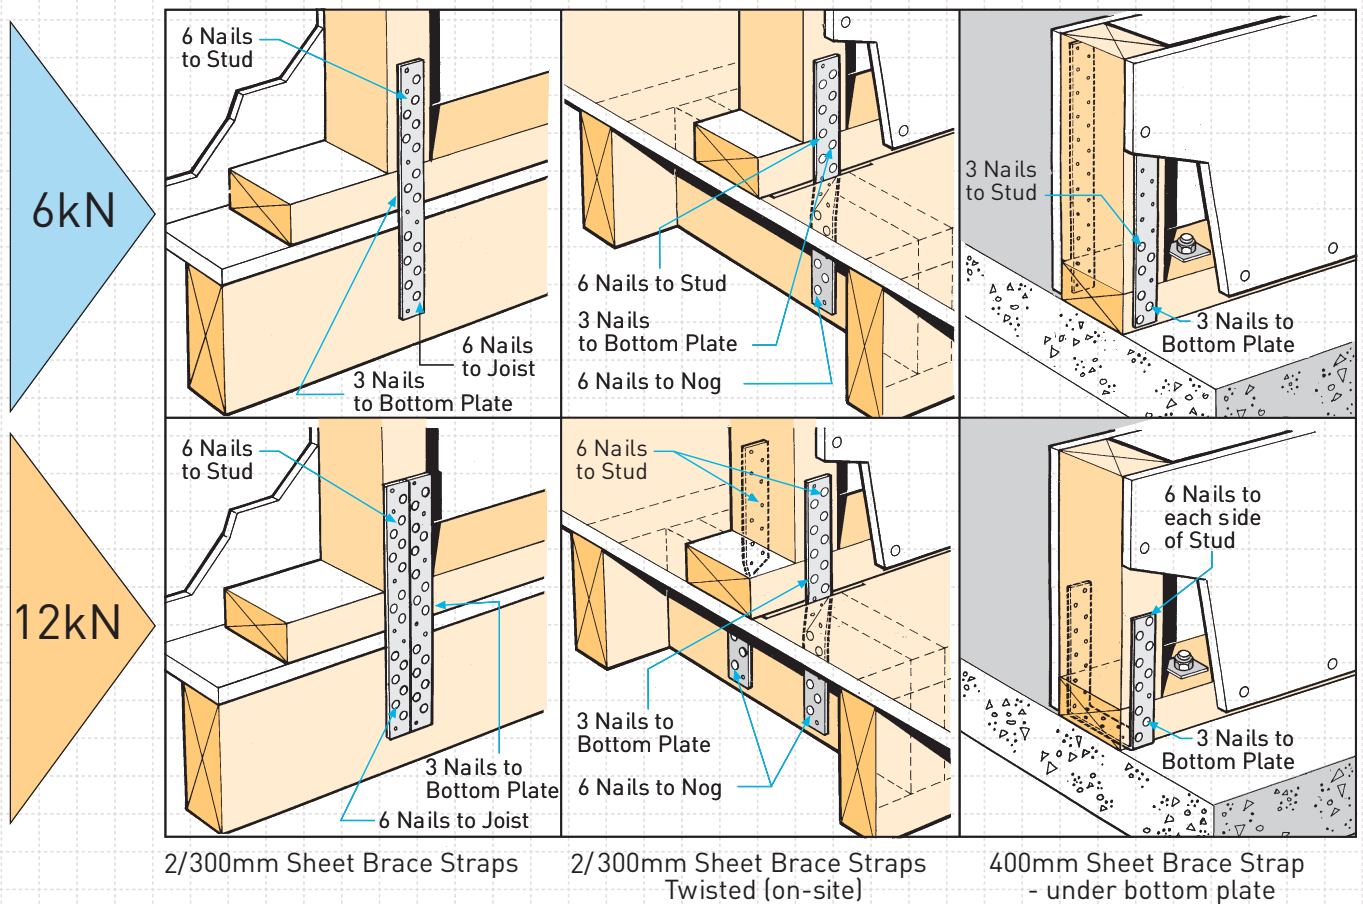

In addition to a bracing wall hold down, this product can be used for a multitude of 6kN fixings situations, as detailed in NZS 3604:2011.

Material: 0.91mm x 25mm G300 Z275 Galvanised Steel.
Nail using LUMBERLOK Product Nails 30mm x 3.15 diameter.
Also available in 0.9mm x 25mm Stainless Steel 304-2B

AVAILABLE FROM LEADING BUILDERS SUPPLY MERCHANTS THROUGHOUT NEW ZEALAND

